


URAL TRUCK 6X6

URAL



URAL 6X6 TECHNICAL SPECIFICATION

DIMENSION	7.739 x 2.550 x 2.900
DISPLACEMENT	14.860 cc
WHEELBASE	3.525 + 1.400 mm
PAYLOAD	6.000 kg
CURB WEIGHT	9.170 kg
GROSS VEHICLE WEIGHT	15.470 kg
TRAILER GROSS WEIGHT	11.500 kg
ENGINE	YAMZ-238M2, V-8 Diesel, 4 Stroke, EURO 0
MAX. TRAVELLING SPEED	80 km/h
MAX. POWER	176 kW (240 h.p.) @ 2.100 min
MAX. TORQUE	883 Nm (90 kgfm) @ 1.250 - 1.450 min
TRANSMISSION	5-Speed, Mechanical Gearbox
BRAKE SYSTEM	Drum Type, Two-circuit, with air over hydraulic control and air booster
STEERING	RHD with Hydraulic Booster
FUEL TANK	300L
ESTIMATED FUEL CONSUMPTION	35 L / 100 km @ 60 km/h
OVERALL TURNING RADIUS	11.4 m
GROUND CLEARANCE	400 mm
FORDING DEPTH	1.5 m
TIRES	KAMA URAL. 390/95 R20

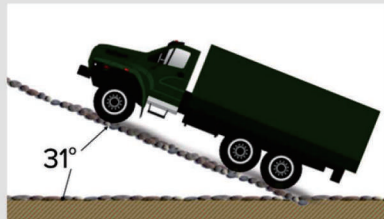


Maximum slope angle
(for combination vehicle
when fully loaded)
not less - 31°



Obstacle height - 550 mm



Fording Depth 1700 mm

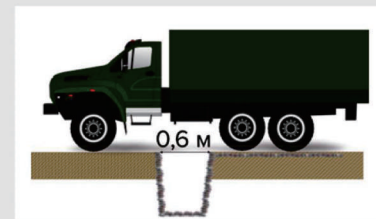

Width of overcome
ditch - 600 mm



PT. RAJAWALI LINTAS KREASI

Jl. Cideng Barat 70 C - E, Cideng

Jakarta Pusat 10150, INDONESIA

T : +6221 38 100 10 F : +6221 38 101 60

E : ralika@cbn.net.id