

URAL TRUCK 4X4

URAL



URAL 4X4 TECHNICAL SPECIFICATION


DIMENSION	7.746 x 2.550 x 2.805
DISPLACEMENT	10.857 cc
WHEELBASE	4.405 mm
PAYLOAD	4.200 kg
CURB WEIGHT	7.650 kg
GVW	12.075 kg
TRAILER GROSS WEIGHT	7.000 kg
ENGINE	YAMZ-238M2, V-6 Diesel, 4 Stroke
MAX. TRAVELLING SPEED	85 km/h
MAX. POWER	132 kW (180 h.p.) @ 2.100 min
MAX. TORQUE	667 Nm (68 kgfm) @ 1.250 - 1.450 min
TRANSMISSION	5-Speed, Mechanical Gearbox
BRAKE SYSTEM	Drum type, two-circuit, with air over hydraulic control and air booster / engine brake.
STEERING	LHD with Hydraulic Booster
FUEL TANK	210 L
ESTIMATED FUEL CONSUMPTION	24 L / 100 km @ 60 km/h
OVERALL TURNING RADIUS	11,4 m
GROUND CLEARANCE	400 mm
FORDING DEPTH	1.2 m
TIRES	KAMA URAL. 390/95 R20 tire disc 515-254




Maximum slope angle
(for combination vehicle
when fully loaded)
not less - 31°



Obstacle height - 550 mm

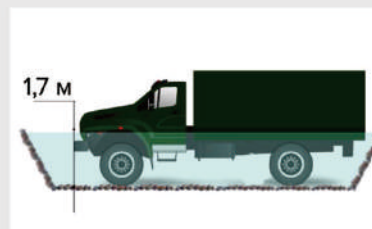

Fording Depth 1700 mm

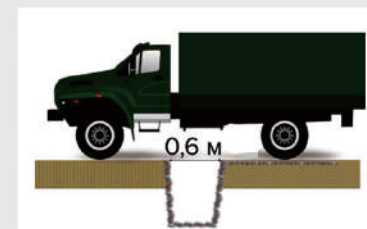

Width of overcome
ditch - 600 mm



PT. RAJAWALI LINTAS KREASI

Jl. Cideng Barat 70 C - E, Cideng
Jakarta Pusat 10150, INDONESIA
T : +6221 38 100 10 F : +6221 38 101 60
E : ralika@cbn.net.id